

IK 10++

IP 54

○ ○ ○
LED
○ ○ ○

CE

Introduction

Light Years Ahead Ltd (LYA) is a leading UK manufacturer of anti-ligature, vandal resistant lighting solutions for the custodial, healthcare, civil and industrial sectors.

LYA have established a leading position in the custodial sector

with thousands of luminaires installed in prisons, courts and police stations across the UK and abroad. LYA's Enduralux and Protectalux brands are renowned for their durability and include a range of Ministry of Justice approved products for use in safer and standard cells.


Primary Applications

Custodial	Corridors, waiting rooms, communal areas
Healthcare	Corridors, hospital wards, communal areas
Civil / Industrial	Car parks, railways stations, subways


Features & Benefits

- Anti-ligature, vandal resistant luminaire suitable for high risk environments
- High impact resistant (IK 10++) 5mm polycarbonate lens secured by tamper proof TORX security screws
- 1.5mm zintec coated mild steel powder coated (RAL 9003) base plate
- Removable GearTray and LED engine mounting plate
- Tridonic electronic componentry
- Suitable for ceiling or wall mounting
- Conduit entry through centre of base plate
- Dimmable, night-light and integral 3-hour duration emergency battery pack options
- Various colour and light output options
- Fully compliant with BS EN 60598-1

Product Dimensions

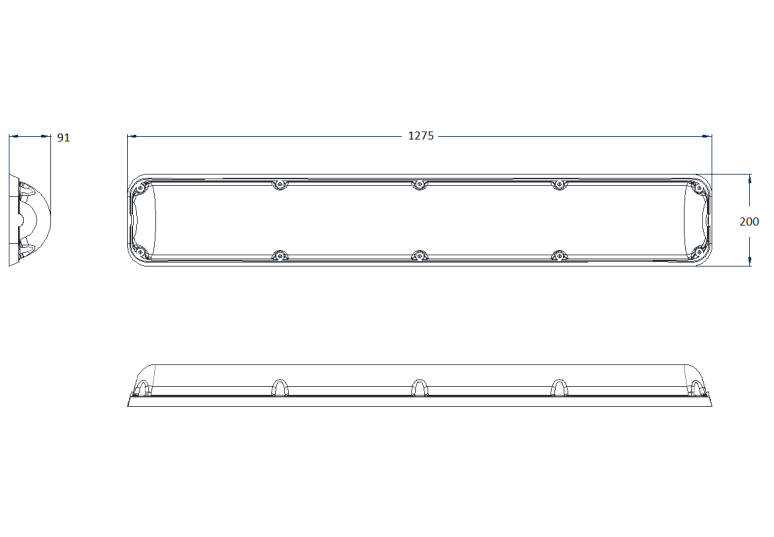

Polar Plot: EN-1275-NM-CW-OP

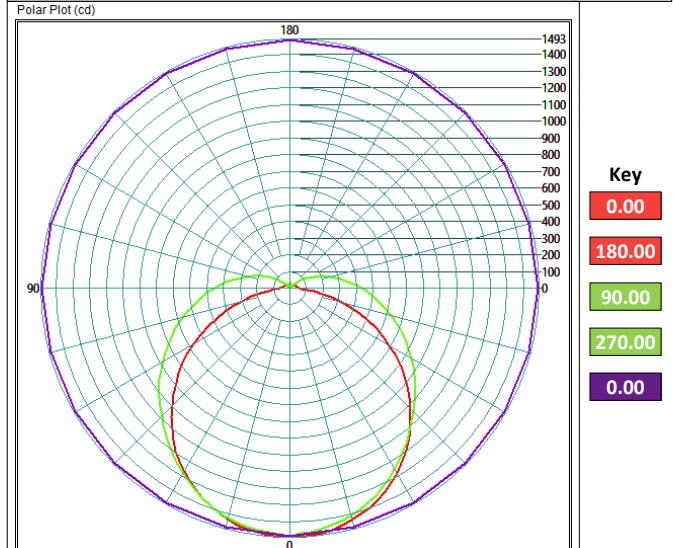


Enduralux LED

1275 LINEAR LUMINAIRE

- OPAL

Ordering Guide & Lighting Data

IES / LDT Files available on Request

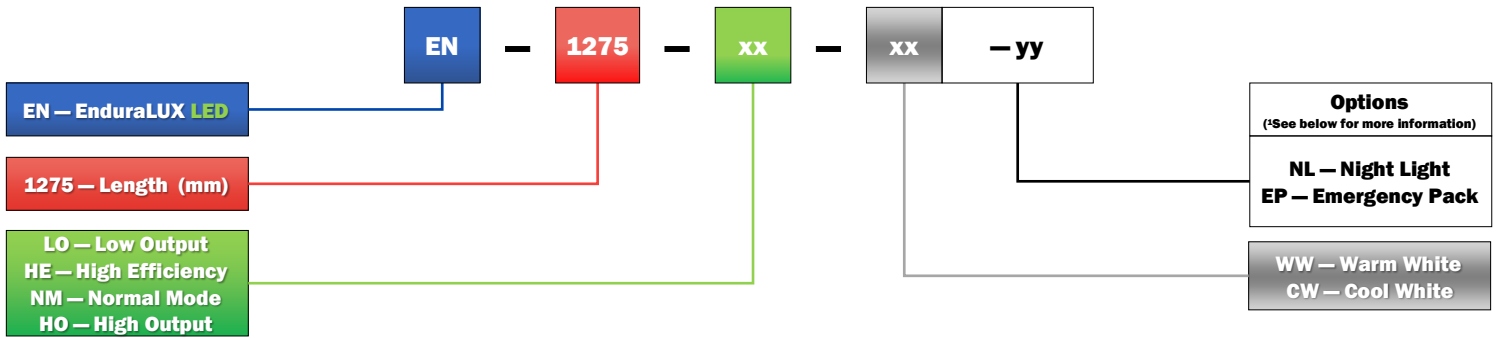

LIGHTING DATA—5MM OPAL LENS

Product Code	CRI	Colour (CCT)	Lumens (Lum)	Wattage (W)	Lum / W	Weight (Kg)
EN-1275-LO-WW-OP	>80	3000k	2,691	35	77	6.8
EN-1275-HE-WW-OP	>80	3000k	3,822	47	81	6.8
EN-1275-NM-WW-OP	>80	3000k	5,382	70	77	6.8
EN-1275-HO-WW-OP	>80	3000k	7,192	99	72	6.8
EN-1275-LO-CW-OP	>80	4000k	2,809	35	80	6.8
EN-1275-HE-CW-OP	>80	4000k	3,989	47	84	6.8
EN-1275-NM-CW-OP	>80	4000k	5,618	70	81	6.8
EN-1275-HO-CW-OP	>80	4000k	7,507	99	76	6.8

Options

- Night-light—add suffix NL
- Integral 3 hour emergency battery pack—add suffix EP
- DALI — add suffix DA

Installation

- Back plate secured to ceiling or wall via 8mm sleeve anchors
- GearTray and LED mounting plate secured by M4 NYLOC nuts
- Lens secured by M6 TORX security screws (TX30 BO driver)

For additional details on the Enduralux LED product or other lighting products and solutions in the Light Years Ahead portfolio, please do not hesitate to contact our expert team using the contact information below.

