


Enduralux LED

675 LINEAR


LUMINAIRE

- OPAL

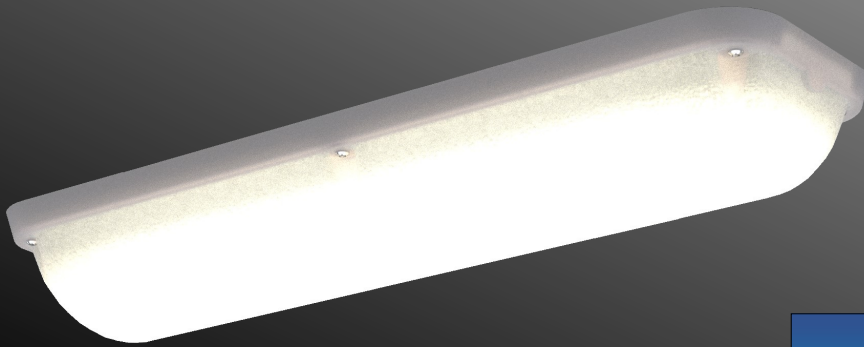

IK 10++

IP 54



Introduction

Light Years Ahead Ltd (LYA) is a leading UK manufacturer of anti-ligature, vandal resistant lighting solutions for the custodial, healthcare, civil and industrial sectors.

LYA have established a leading position in the custodial sector

with thousands of luminaires installed in prisons, courts and police stations across the UK and abroad. LYA's Enduralux and Protectalux brands are renowned for their durability and include a range of Ministry of Justice approved products for use in safer and standard cells.


Primary Applications

Custodial	Cells, stairwells, plant and utility areas
Healthcare	Patient rooms, hospital wards
Civil / Industrial	Stairwells, schools, plant and utility areas


Features & Benefits

- Anti-ligature, vandal resistant luminaire suitable for high risk environments
- High impact resistant (IK 10++) 5mm polycarbonate lens secured by tamper proof TORX security screws
- 1.5mm zintec coated mild steel powder coated (RAL 9003) base plate
- Removable GearTray and LED engine mounting plate
- Tridonic electronic componentry
- Suitable for ceiling or wall mounting
- Conduit entry through centre of base plate
- Dimmable, night-light and integral 3-hour duration emergency battery pack options
- Various colour and light output options
- Fully compliant with BS EN 60598-1

Product Dimensions

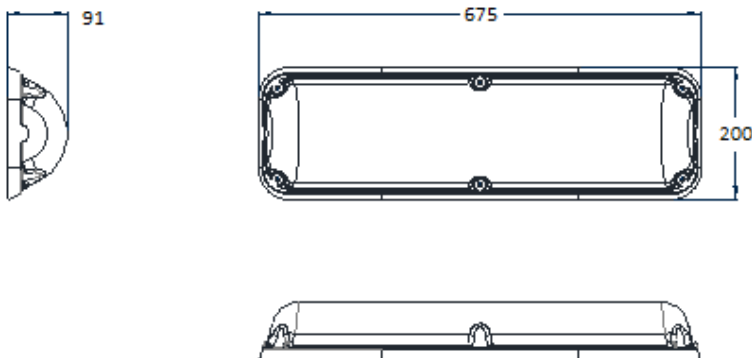

Polar Plot: EN-675-NM-CW-OP

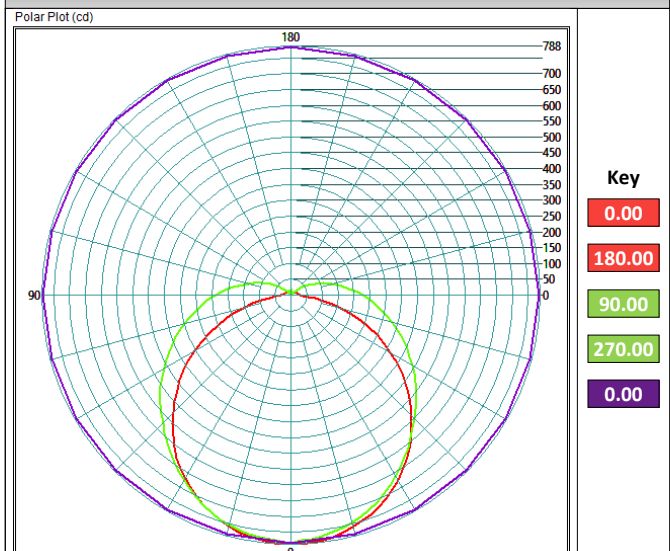


Enduralux LED 675 LINEAR LUMINAIRE

- OPAL

Ordering Guide & Lighting Data

IES / LDT Files available on Request

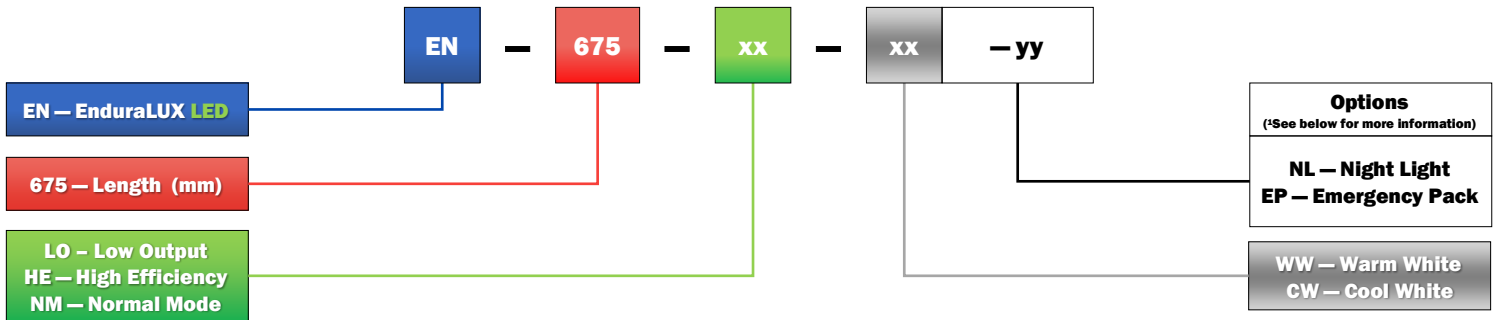

LIGHTING DATA—5MM OPAL LENS

Product Code	CRI	Colour (CCT)	Lumens (Lum)	Wattage (W)	Lum / W	Weight (Kg)
EN-675-LO-WW-OP	>80	3000k	1,911	24	81	3.6
EN-675-HE-WW-OP	>80	3000k	2,839	36	80	3.6
EN-675-NM-WW-OP	>80	3000k	4,037	52	77	3.6
EN-675-LO-CW-OP	>80	4000k	1,991	24	84	3.6
EN-675-HE-CW-OP	>80	4000k	2,964	36	83	3.6
EN-675-NM-CW-OP	>80	4000k	4,219	52	81	3.6

Options

- Night-light—add suffix NL
- Integral 3 hour emergency battery pack—add suffix EP
- DALI — add suffix DA

Installation

- Back plate secured to ceiling or wall via 8mm sleeve anchors
- GearTray and LED mounting plate secured by M4 NYLOC nuts
- Lens secured by M6 TORX security screws (TX30 BO driver)

For additional details on the Enduralux LED product or other lighting products and solutions in the Light Years Ahead portfolio, please do not hesitate to contact our expert team using the contact information below.

