


Product Specification

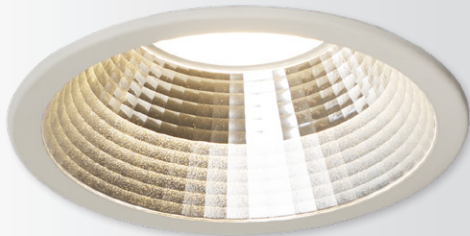

Features & Benefits

- Como Standard is a recessed downlight, with unique thermal management via an entire cast aluminium body
- Available in three sizes - 100mm, 150mm and 200mm diameter recess
- Clear 3mm polycarbonate (option for opal liner)
- Flush mounting, for a discreet appearance
- IP54 and IK10 rated (20J)
- Interchangeable components and spares between same diameter Como, Como AV and Como AL
- Optional tamper-resistant screws
- Remote fixed output, Emergency remote as required
- Available from stock

Primary Applications

High Risk

Suitable for staff and visitor areas

Custodial

Suitable for staff and visitor areas

Mental Health

Suitable for staff and visitor areas

Infrastructure

Car parks, railway stations and subways

Specification Assist

Recessed downlight, IK10 (20J) and >IP54 with cast aluminium body and 3mm polycarbonate LED clear lens. Part L compliant (>90lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 50,000 hours



Designed and
Manufactured
in the UK



+44 (0) 1787 881191

info@lightyearsahed.co.uk


lightyearsahed.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHED

Product Dimensions – Como 200

To suit circular cutout between 175 - 200mm in diameter

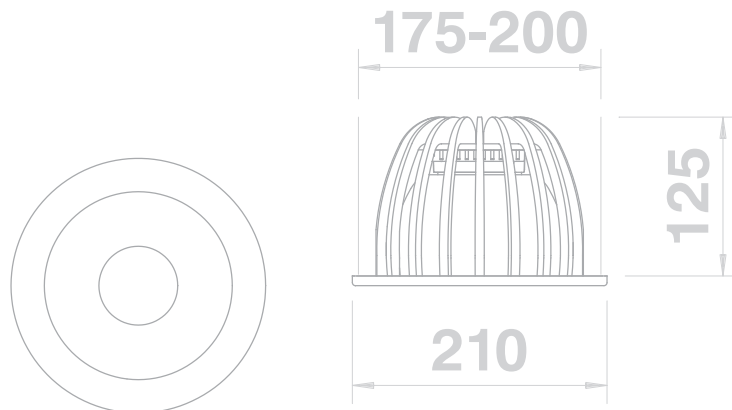

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
COM-200-MN-4K	>80	4000K	822	7.5	110	1.5
COM-200-L0-4K	>80	4000K	1038	9.5	109	1.5
COM-200-L1-4K	>80	4000K	1253	11.5	109	1.5
COM-200-L2-4K	>80	4000K	1434	13.0	109	1.5
COM-200-L3-4K	>80	4000K	1649	15.0	109	1.5
COM-200-L4-4K	>80	4000K	1864	17.0	109	1.5
COM-200-L5-4K	>80	4000K	2080	19.0	108	1.5
COM-200-L6-4K	>80	4000K	2391	22.0	108	1.5
COM-200-L7-4K	>80	4000K	2702	25.0	108	1.5
COM-200-L8-4K	>80	4000K	2992	28.0	107	1.5
COM-200-L9-4K	>80	4000K	3281	32.0	103	1.5
COM-200-MX-4K	>80	4000K	3571	35.0	102	1.5

Optional Extras Additional options are available. Please contact us for more information.

-EP	Integral emergency	-CB	Central battery inverter	-3K	3000K (5% lower lumen)
-EPS	Integral self-test emergency	-DA	DALI	-OP	Opal liner
-EPD	Integral DALI emergency	-SD	Switch dim	-BL	Black Trim
-EPH	Emergency high output	-BT	Bluetooth control	-TRS	Tamper Resistant Screws

+44 (0) 1787 881191

info@lightyearsahead.co.uk


lightyearsahead.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHEAD

Product Dimensions – Como 150

To suit circular cutout 150mm in diameter

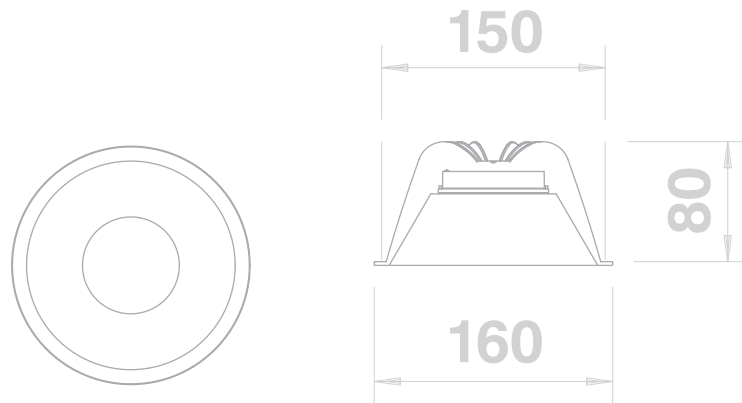

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
COM-150-MN-4K	>80	4000K	879	7.5	110	1.25
COM-150-L0-4K	>80	4000K	1148	9.5	112	1.25
COM-150-L1-4K	>80	4000K	1404	13.0	108	1.25
COM-150-L2-4K	>80	4000K	1601	15.0	107	1.25
COM-150-L3-4K	>80	4000K	1800	17.0	106	1.25
COM-150-L4-4K	>80	4000K	1998	19.0	105	1.25
COM-150-L5-4K	>80	4000K	2175	21.0	104	1.25
COM-150-L6-4K	>80	4000K	2533	25.0	101	1.25
COM-150-L7-4K	>80	4000K	2907	29.0	100	1.25

Optional Extras

Additional options are available. Please contact us for more information.

-EP	Integral emergency	-CB	Central battery inverter	-3K	3000K (5% lower lumen)
-EPS	Integral self-test emergency	-DA	DALI	-WH	No reflector
-EPD	Integral DALI emergency	-SD	Switch dim	-TRS	Tamper Resistant Screws
-EPH	Emergency high output	-BT	Bluetooth control		

+44 (0) 1787 881191

info@lightyearsahed.co.uk


lightyearsahed.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHED

Product Dimensions – Como 100

To suit circular cutout 100mm in diameter

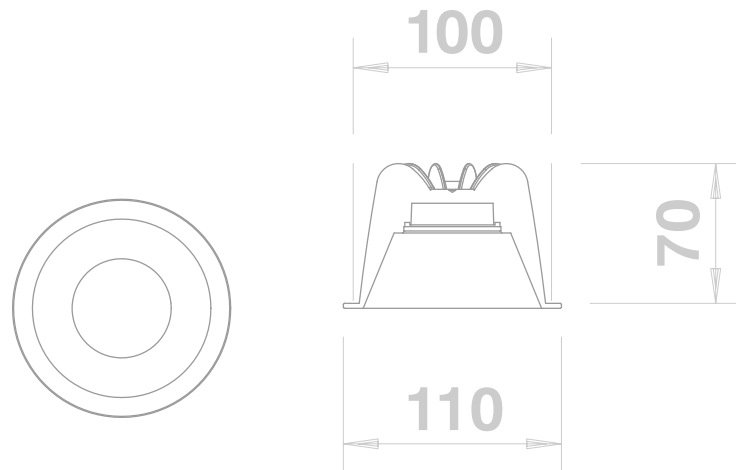

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
COM-100-MN-4K	>80	4000K	692	7.5	94	1.0
COM-100-L0-4K	>80	4000K	904	9.5	95	1.0
COM-100-L1-4K	>80	4000K	1106	11.5	96	1.0
COM-100-L2-4K	>80	4000K	1261	13.5	94	1.0
COM-100-L3-4K	>80	4000K	1417	15.0	94	1.0
COM-100-L4-4K	>80	4000K	1573	16.5	94	1.0
COM-100-L5-4K	>80	4000K	1713	18.5	93	1.0

Optional Extras

Additional options are available. Please contact us for more information.

-EP	Integral emergency	-CB	Central battery inverter	-3K	3000K (5% lower lumen)
-EPS	Integral self-test emergency	-DA	DALI	-WH	No reflector
-EPD	Integral DALI emergency	-SD	Switch dim	-TRS	Tamper Resistant Screws
-EPH	Emergency high output	-BT	Bluetooth control		

+44 (0) 1787 881191

info@lightyearsahed.co.uk

lightyearsahed.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHED