

Enduralux® Linear

675 / 975 / 1275 Linear Luminaires

Product Specification



Features & Benefits

- Vandal-resistant luminaire suitable for high-risk environments
- High-impact resistant IK15 (125J) 5mm polycarbonate lens secured by tamper-proof Resistox security screws
- 1.5mm zinc coated mild steel powder coated (RAL 9003) base plate
- Removable gear tray and LED engine
- Tridonic electronic componentry
- Suitable for ceiling or wall mounting
- Conduit entry through centre of base plate
- Dimmable, night light and integral three-hour duration emergency battery pack options
- Various colour and light output options
- Fully compliant with BS EN 60598-1

Primary Applications

High Risk

Designed for low, medium and high-risk secure services

Custodial

Corridors and communal areas

Mental Health

Patient rooms, hospital wards and corridors

Infrastructure

Car parks, railway stations and subways

Specification Assist

Linear luminaire, anti-vandal >IK15 (125J) and >IP54 with 1.5mm zinc coated steel mounting plate and base plate, 5mm polycarbonate LED lens, secured with Resistox screws. Part L compliant (>100lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 72,000 hours



Designed and
Manufactured
in the UK



+44 (0) 1787 881191
info@lya.co.uk

lya.co.uk



Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHEAD

Enduralux® Linear

675 / 975 / 1275 Linear Luminaire

Product Dimensions

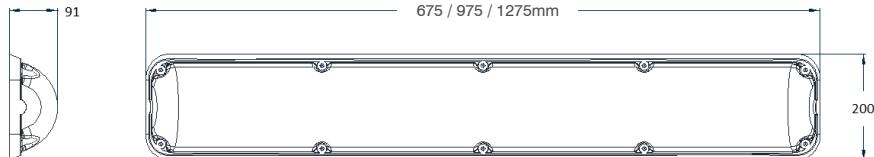

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
EN-675-L1-4K	>80	4000K	1423	12	120	3.5
EN-675-L3-4K	>80	4000K	1985	17	119	3.5
EN-675-L5-4K	>80	4000K	2516	22	117	3.5
EN-675-L7-4K	>80	4000K	2995	27	112	3.5
EN-675-L9-4K	>80	4000K	3496	32	110	3.5
EN-975-L1-4K	>80	4000K	2135	18	120	5.5
EN-975-L3-4K	>80	4000K	2978	25	119	5.5
EN-975-L5-4K	>80	4000K	3775	33	116	5.5
EN-975-L7-4K	>80	4000K	4493	40	112	5.5
EN-975-L9-4K	>80	4000K	5244	48	110	5.5
EN-1275-L1-4K	>80	4000K	2847	24	119	7.5
EN-1275-L3-4K	>80	4000K	3971	33	120	7.5
EN-1275-L5-4K	>80	4000K	5033	43	117	7.5
EN-1275-L7-4K	>80	4000K	5990	53	113	7.5
EN-1275-L9-4K	>80	4000K	6993	64	103	7.5

Optional Extras

Available on request. Additional options are available. Please contact us for more information.

-EP Integral emergency battery
-NL Night light
-DA DALI

-CM Surface conduit mounting brackets
-OP Opal lens

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191
info@lya.co.uk

lya.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHEAD