

# Iris VLR

## Vandal & Ligature Resistant Bulkhead

### Product Specification



### Features & Benefits

- Iris VLR (vandal and ligature resistant) has a decorative appearance with a unique diffuser designed to diffuse the LEDs, with impact resistance
- Aluminium body and trim ring with a high output polycarbonate, anti-vandal diffuser
- Ligature resistant when ceiling mounted
- Flush mounting with tamper-proof screws
- IP65 and IK11 rated (50J)
- Removable gear tray, universal fitment across the entire Iris range
- White finish as standard, others colours available
- Dimmable, night light and integral three-hour duration emergency options available, including self-test, EmPro, wireless and Melagen dynamic lighting

### Primary Applications

#### High Risk

Designed for low, medium and high-risk secure services

#### Custodial

Washrooms, walkways, stairwells and maintenance areas

#### Mental Health

Corridors, stairwells and day rooms

#### Infrastructure

Car parks, railway stations and subways

### Specification Assist

Round bulkhead, vandal resistant >IK11 (50J) and >IP65 with thick aluminium body and 3mm polycarbonate LED Opal lens, secured with Resistox screws. Part L compliant (>120lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 72,000 hours



Designed and  
Manufactured  
in the UK



+44 (0) 1787 881191  
info@lya.co.uk

[lya.co.uk](http://lya.co.uk)

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHT YEARS AHEAD**


# Iris VLR

## Vandal & Ligature Resistant Bulkhead

### Product Dimensions

Diameter 355mm

Depth 120mm

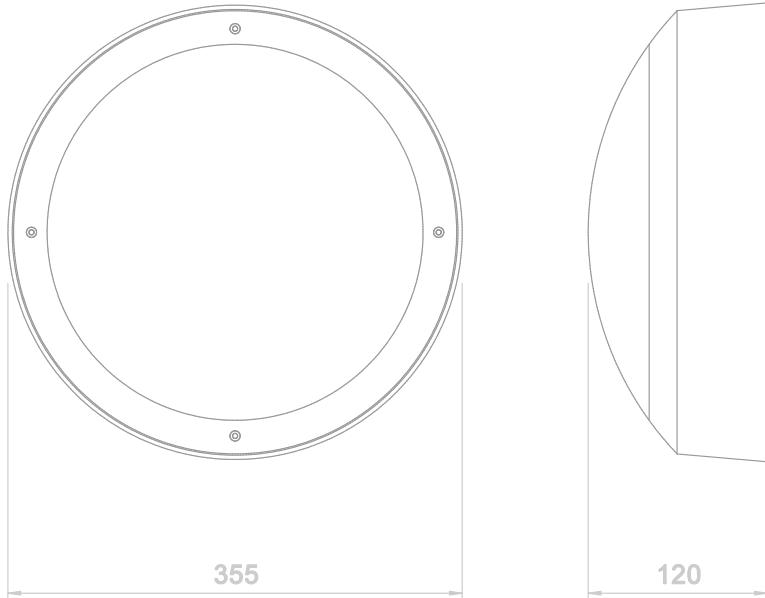

### Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
IRS-VLR-L1-4K	>80	4000K	1151	9.0	128	2.0
IRS-VLR-L3-4K	>80	4000K	1703	13.0	133	2.0
IRS-VLR-L5-4K	>80	4000K	2236	18.0	128	2.0
IRS-VLR-L7-4K	>80	4000K	2742	22.0	128	2.0
IRS-VLR-L9-4K	>80	4000K	3602	30.0	120	2.0

### Optional Extras

Additional options are available. Please contact us for more information.

-EP	Integral emergency	-CB	Central battery inverter	-BT	Bluetooth control
-EPS	Integral self-test emergency	-DA	DALI	-PB	RAL9005 black finish
-EPD	Integral DALI emergency	-SD	Switch dim	-NL	Night light
-EPH	Emergency high output	-MW	Microwave sensor	-3K	3000K (5% lower lumen)

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191

info@lya.co.uk

**lya.co.uk**

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHT YEARS AHEAD**