

# Resistalux™ Cornice

## 300 / 600 / 1200 / 1500 Linear Luminaires

### Product Specification



### Features & Benefits

- A sleek option for areas where IK/vandal-resistant fittings are required
- Manufactured in extruded aluminium with a durable white polyester powder coat finish
- IP54 rating reduces dust and insects from entering the fitting
- End-caps are fixed in place with stainless steel anti-tamper screws
- High-output extruded polycarbonate opal diffuser is utilised to help comply with UGR<19
- 300mm Bulkhead version also available
- IP65 version available for washrooms, kitchens and utility areas
- Optional cable way system available, please contact us for more details

### Primary Applications

#### High Risk

Designed for low, medium and high-risk secure services

#### Custodial

Corridors and communal areas, washrooms (IP65)

#### Mental Health

Corridors and communal areas, washrooms (IP65)

#### Infrastructure

Car parks, railway stations and subways

### Specification Assist

Linear luminaire, anti-vandal >IK11 (50J) and >IP54 with aluminium extruded body and 4mm polycarbonate LED Opal lens, optional extruded aluminium cable way, secured with Resistox screws. Part L compliant (>120lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 72,000 hours



Designed and  
Manufactured  
in the UK



+44 (0) 1787 881191  
info@lya.co.uk

[lya.co.uk](http://lya.co.uk)

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHT YEARS AHEAD**

# Resistalux™ Cornice


## 300 / 600 / 1200 / 1500 Linear Luminaires

### Product Dimensions

**Length** 300/600/1200/1500mm

**Width** 155mm

**Depth** 155mm

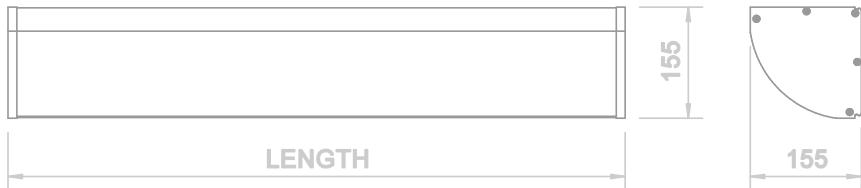

### Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
RSTC-300-L5-4K	>80	4000K	1310	11	120	2.5
RSTC-600-L2-4K	>80	4000K	1962	16	124	4.0
RSTC-600-L4-4K	>80	4000K	2407	20	120	4.0
RSTC-600-L6-4K	>80	4000K	2810	23	122	4.0
RSTC-600-L8-4K	>80	4000K	3246	27	120	4.0
RSTC-1200-L2-4K	>80	4000K	3924	30	132	7.5
RSTC-1200-L4-4K	>80	4000K	4814	37	129	7.5
RSTC-1200-L6-4K	>80	4000K	5620	45	125	7.5
RSTC-1200-L8-4K	>80	4000K	6491	53	123	7.5
RSTC-1500-L2-4K	>80	4000K	4905	37	132	9.0
RSTC-1500-L4-4K	>80	4000K	6017	47	129	9.0
RSTC-1500-L6-4K	>80	4000K	7025	56	125	9.0
RSTC-1500-L8-4K	>80	4000K	8113	66	123	9.0

### Optional Extras

Additional options are available. Please contact us for more information.

-EP	Integral emergency	-DA	DALI	-PB	RAL9005 black finish
-EPS	Integral self-test emergency	-SD	Switch dim	-PG	RAL7016 grey finish
-EPD	Integral DALI emergency	-MW	Microwave sensor	-3K	3000K (5% lower lumen)
-CB	Central battery inverter	-BT	Bluetooth control	-IP	IP65 upgrade

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191

info@lya.co.uk

**lya.co.uk**

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHT YEARS AHEAD**