

Guardalux Cornice

Emergency Bulkhead

Product Specification



Features & Benefits

- Guardalux Cornice is an emergency bulkhead with a unique lens designed to diffuse the LEDs with high impact resistance and high efficacy.
- Zinc coated steel body with a high output polycarbonate, anti-vandal diffuser
- Flush mounting with tamper-proof screws suitable for ceiling and wall mounting
- IP54 and IK15 rated (125J)
- Removable gear tray
- Rear cable entry, side entry available upon request
- Fixed output, maintained and non-maintained integral three-hour duration emergency options available, including self-test, DALI, and wireless monitoring
- Reduced ligature when mounted into cornice.
- 4-year warranty on emergency battery

Primary Applications

High Risk

Designed for low, medium and high-risk secure services

Custodial

Corridors, walkways, stairwells and maintenance areas

Mental Health

Corridors, stairwells and day rooms

Infrastructure

Car parks, railway stations, subways and housing

Specification Assist

Emergency bulkhead, vandal resistant >IK15 (50J) and >IP54 with 1.2mm zinc coated steel body and 4mm polycarbonate LED Opal lens, secured with Resistox screws. Part L compliant (>120lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 72,000 hours



Designed and
Manufactured
in the UK



CE UK CA

+44 (0) 1787 881191
info@lightyearsahead.co.uk

lightyearsahead.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHEAD

Guardalux Cornice


Emergency Bulkhead

Product Dimensions

Length 375mm

Width 127mm

Depth 127mm

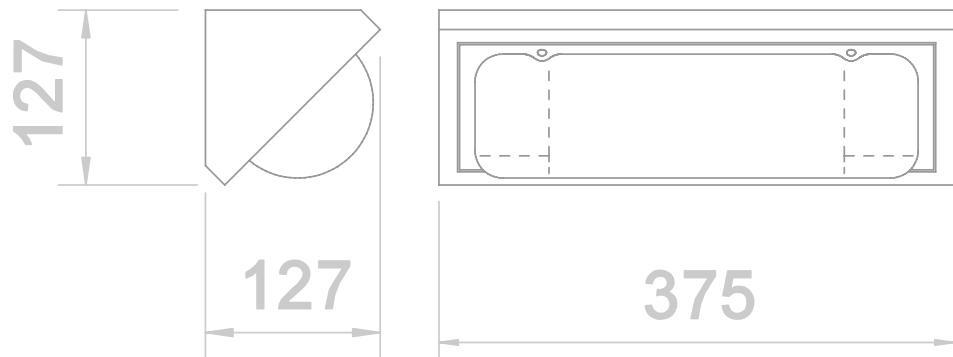

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
GDLC-L4-4K	>80	4000K	1300	11.0	124	2.0
GDLC-L6-4K	>80	4000K	1625	13.0	125	2.0
GDLC-L8-4K	>80	4000K	1950	16.0	125	2.0
GDLC-MX-4K	>80	4000K	2275	19.0	120	2.0
GDLC-4K-NM*	>80	4000K	300	2.0	n/a	2.0
GDLC-4K-NMH*	>80	4000K	700	5.0	n/a	2.0

*Non-maintained emergency only, will not work in mains operation. For maintained add -EP etc to standard part number

Optional Extras

Additional options are available, not all are compatible. Please contact us for more information.

-EP	Integral emergency
-EPS	Integral self-test emergency
-EPD	Integral DALI emergency
-EPH	Emergency high output

-CB	Central battery inverter
-DA	DALI
-SD	Switch dim
-MW	Microwave sensor

-IP	IP65 upgrade
-PB	RAL9005 black finish
-PG	RAL7016 grey finish
-3K	3000K (5% lower lumen)

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191

info@lightyearshead.co.uk

lightyearshead.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHEAD