

OWL Exterior Bulkhead

Overhead Wall Light

Product Specification



HIGH RISK



MENTAL HEALTH



CUSTODIAL



INFRASTRUCTURE

Features & Benefits

- OWL Range has a decorative appearance and is available in 3 sizes. The triangular, sculpted shape and high impact resistance make it perfect as an overhead exterior solution in demanding environments
- Heavy gauge die-cast aluminium housing with a high output polycarbonate, anti-vandal diffuser
- Recessed profile fixings, coupled with tamper-proof Resistorex security screws and sloping shape reduces ligature potential, while also deterring wildlife from nesting or roosting
- IP65 and IK11 rated (50J)
- Anthracite grey finish as standard (other colours available upon request)
- Suitable for rear and side cable entry
- Suitable for conduit and BESA box installation
- PCB integrated with diffuser for easy installation
- Selectable colour 3000K / 4000K output (not included on Owl Asymmetric)

Primary Applications

High Risk

Designed for low, medium and high-risk secure services

Custodial

Exterior applications

Mental Health

Exterior applications

Infrastructure

Car parks, railway stations and subways

Specification Assist

Triangular bulkhead, weather and vandal resistant >IK11 (50J) and >IP65 with thick aluminium body and 3mm polycarbonate LED Opal lens, tamper-proof Resistorex security screws. Part L compliant (>125lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 50,000 hours



Assembled
in the UK



+44 (0) 1787 881191

info@lightyearsahed.co.uk

lightyearsahed.co.uk


Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHED

OWL Exterior Bulkhead

Overhead Wall Light

Product Dimensions

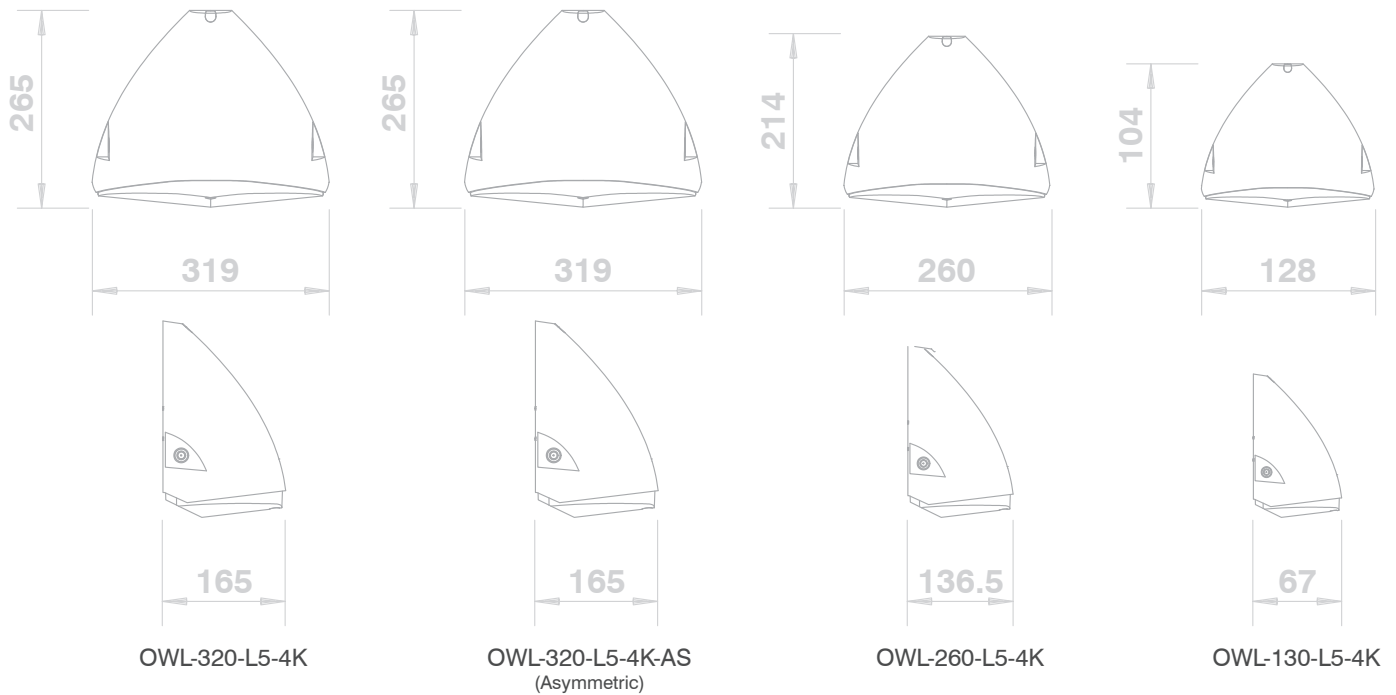

Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)			Wattage (w)			lm/W			Weight (kg)
OWL-320-L5-4K	>80	3/4000K	1757	2453	3487	13	18	27	139	138	132	2.5kg
OWL-320-L5-4K-AS	>80	4000K	1825	2539	3603	13	18	28	141	139	132	2.5kg
OWL-260-L5-4K	>80	3/4000K	977	1183	1433	7	8	10	146	143	140	1.5kg
OWL-130-L5-4K	>80	3/4000K	-	585	-	-	5	-	-	127	-	0.5kg

Optional Extras

Additional options are available. Please contact us for more information.

-EP Integral emergency -EPS Self-test emergency -PEC Photocell

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191
info@lightyearsahed.co.uk
lightyearsahed.co.uk

Church Field Road, Sudbury, Suffolk CO10 2YA

LIGHT YEARS AHED

Light Years Ahead is a company registered in England & Wales. Registration Number: 10722911.