

# Guardalux Exterior

## Emergency Bulkhead

### Product Specification



HIGH RISK



MENTAL HEALTH



CUSTODIAL



INFRASTRUCTURE

### Features & Benefits

- Guardalux Exterior is an emergency bulkhead with a unique diffuser designed to diffuse the LEDs with high impact resistance and high efficacy.
- Zinc coated steel body with a high output polycarbonate, anti-vandal diffuser
- Flush mounting with tamper-proof screws
- IP65 and IK15 rated (125J)
- Removable gear tray
- Rear cable entry, side entry available upon request
- Fixed output, maintained and non-maintained integral three-hour duration emergency options available, including self-test, DALI, and wireless monitoring
- Reduced ligature for final exit door exteriors
- 4-year warranty on emergency battery

### Primary Applications

#### High Risk

Designed for low, medium and high-risk secure services

#### Custodial

Above exit routes and doors, outdoors

#### Mental Health

Above exit routes and doors, outdoors

#### Infrastructure

Car parks and exit routes and doors, outdoors

### Specification Assist

Emergency bulkhead, vandal resistant >IK15 (50J) and >IP65 with 1.2mm zinc coated steel body and 4mm polycarbonate LED Opal lens, secured with Resistox screws. Part L compliant (>100lm/W), low flicker adjustable LED driver, replaceable LEDs with CRI >80 and lifetime in excess of 72,000 hours



Designed and  
Manufactured  
in the UK



+44 (0) 1787 881191  
info@lightyearsahead.co.uk

**lightyearsahead.co.uk**

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHTYEARS AHEAD**

# Guardalux Exterior


## Emergency Bulkhead

### Product Dimensions

**Length** 375mm

**Depth** 160mm

**Height** 140mm

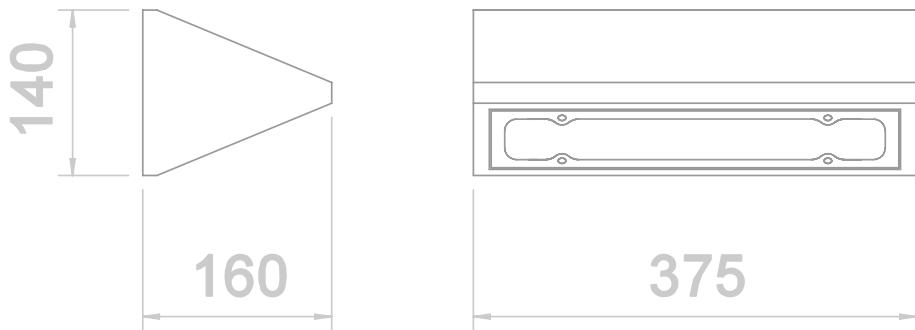

### Lighting Data

Product Code	CRI	Colour Temp	Lumens (lm)	Wattage (W)	lm/W	Weight (kg)
GDLEXT-L4-4K	>80	4000K	1100	11.0	100	2.0
GDLEXT-L6-4K	>80	4000K	1350	13.0	104	2.0
GDLEXT-L8-4K	>80	4000K	1650	16.0	104	2.0
GDLEXT-MX-4K	>80	4000K	1900	19.0	100	2.0
GDLEXT-4K-NM*	>80	4000K	300	2.0	n/a	2.0
GDLEXT-4K-NMH*	>80	4000K	700	5.0	n/a	2.0

\*Non-maintained emergency only, will not work in mains operation. For maintained add -EP etc to standard part number

### Optional Extras

Additional options are available, not all are compatible. Please contact us for more information.

-EP	Integral emergency	-CB	Central battery inverter	-PC	Photocell
-EPS	Integral self-test emergency	-DA	DALI	-PB	RAL9005 black finish
-EPD	Integral DALI emergency	-SD	Switch dim	-PG	RAL7016 grey finish
-EPH	Emergency high output	-MW	Microwave sensor	-3K	3000K (5% lower lumen)

For additional details on this or any other lighting products and solutions in the Light Years Ahead portfolio, please contact our expert team.

+44 (0) 1787 881191  
info@lightyearshead.co.uk

**lightyearshead.co.uk**

Church Field Road, Sudbury, Suffolk CO10 2YA

**LIGHT YEARS AHEAD**